

ISLEVER

642-072

Cisco Unity Design and Networking(CUDN)

DEMO

<https://www.islever.com/642-072.html>

<https://www.islever.com/cisco.html>

For the most up-to-date exam questions and materials, we recommend visiting our website, where you can access the latest content and resources.

QUESTION NO: 1

During the presales phase of the design process, which design template do you use to ensure you understand the customer goals?

- A. customer needs statement
- B. customer expectation validation
- C. customer feature and function list
- D. customer requirements verification

Answer: D

QUESTION NO: 2

Your customer developed a preliminary Bill of Materials for a Cisco Unity voice-mail-only installation for their two locations. They will create a new forest/domain (VM.com) and use off-box Exchange message stores. Their Bill of Materials shows two Exchange servers and two Cisco Unity servers. They plan on using the domain controllers/global catalog servers in their existing domain for authentication. What do you tell the customer?

- A. A domain controller/global catalog is needed in VM.com
- B. The Bill of Materials is accurate.
- C. Cross-box authentication must be enabled on the Cisco Unity server.
- D. The customer should use on-box Exchange message store.

Answer: A

QUESTION NO: 3

In which messaging configuration must the schema be extended for Cisco Unity?

- A. Exchange 2000/2003
- B. Exchange 5.5
- C. Domino/Exchange mixed-mode
- D. Lotus Domino

Answer: A

QUESTION NO: 4

Your customer has a 10,000-user voice-mail-only deployment. The TDM phone system (not a Cisco Unified CallManager) that supports all the users is located in the Southern regional office

and the telephone system integration uses a serial connection. You have requested space for the Cisco Unity servers and they have assigned space in the Northern regional office with the data servers. The bandwidth between the Southern and Northern regional offices is dial-up via analog lines. Which statement is true?

- A. This solution will work; the phone system and the voice-mail system do not need to be in the same location.
- B. This solution will not work; you must provide T1-level bandwidth to redirect the serial integration data.
- C. This solution will work; the phone system and the voice-mail system can use the analog dial-up connection to communicate with each other.
- D. This solution will not work; you must have the phone system and the voice-mail system in the same location, or enough bandwidth to use the remote PIMG option.

Answer: D

QUESTION NO: 5

Some Cisco Unity Unified Messaging users complain that they cannot make a TRaP connection when attempting to play and record messages through their desktops. What is a possible cause of this?

- A. A firewall separates these users from Cisco Unity.
- B. The Cisco Unity server does not have a sufficient number of Unified Messaging licenses.
- C. These users are not licensed for Unified Messaging.
- D. These users need to have their Exchange mailboxes modified to allow access.

Answer: A

QUESTION NO: 6

You have a customer who is just starting the migration from a Cisco Unity solution that features Octel interoperability. They are on the first site to have the Octel server replaced with a Cisco Unity solution. The setup and configuration is done but there is a problem with message delivery to the Octel nodes. The administrator for the old site gave your technician incorrect Octel Node IDs. There are over 60 different Octel nodes. Your technician has asked if there is a utility to make the ID changes all at once or if the Cisco Unity System administrator must go through one delivery location at a time.

Select the correct statement.


- A. Use the Cisco Unity system administrator. There is no utility that allows modification of delivery locations
- B. Use the Cisco Unity system administrator. There is a separate utility that allows modification of delivery locations, but it was not purchased by the customer.
- C. Use the Bulk Import tool from Tools depot.
- D. Use the Delivery Location Import and Change tool in the Commserver/Techtools folder.

Answer: C

QUESTION NO: 7

Refer to the exhibit. A company has a remote branch with 50 telephones. There are no hardware transcoders on the routers.

With the configuration as presented, which statement is true about codec use on the Cisco Unity?

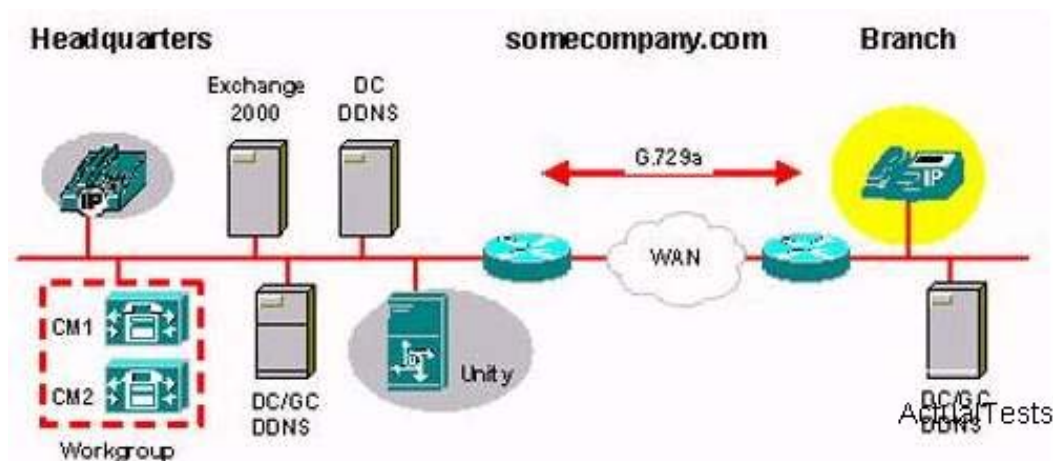

- A. Cisco Unity should use G.729a for messages and G.711 for prompts.
- B. Cisco Unity should be set to use G.729a.
- C. Cisco Unity should always use G.711 for messages.
- D. Cisco Unity codec must always be matched to Cisco Unified CallManager in centralized messaging deployments.

Answer: B

QUESTION NO: 8

You are conducting a physical site survey. What two items require data collection? (Choose two.)

- A. What type of work is done on site?
- B. Are there any messaging servers on site?
- C. How many managers are on site?