

ISLEVER

JN0-530

juniper networks certified internet
specialist(jncis-fwv)

DEMO

<https://www.islever.com/jn0-530.html>

<https://www.islever.com/juniper.html>

For the most up-to-date exam questions and materials, we recommend visiting our website, where you can access the latest content and resources.

Note: The answer is for reference only, you need to understand all question.

QUESTION 1

Which statement is most correct in explaining weights and their use in this redundant VPN configuration?

Member 1 weight 3

Member 2 weight 2

Member 3 weight 1

- A. Weight is not a valid configuration option for Redundant VPNs.
- B. Weight is a distribution factor, Member 2 will carry 10 times the traffic of Member .
- C. Weight is used to determine which VPN in the Group carries traffic, Member 2 will carry the traffic.
- D. Weight is used to determine which VPN in the group carries traffic, member 1 will carry the traffic.
- E. Weight is distribution value, Member 1 will carry the most traffic, while member 2 will carry 1/10 that amount.

Answer: D

QUESTION 2

Your VPN device has a dynamic address, and does not use an FQDN. Which three (3) do you need to configure on your device for a successful Phase I connection to your peer?

- A. DNS
- B. Peer id
- C. Local id
- D. Main mode
- E. Aggressive mode
- F. Static-ip of remote IKE peer

Answer: CEF

QUESTION 3

Which two (2) statements regarding Certificate Revocation Lists are correct?

- A. The CRL is time stamped to identify revoked certificates
- B. CRLs are maintained by independent agents to insure accuracy
- C. A CRL contains the names and IP addresses of Certificates that have been revoked by the CA
- D. New CRLs are issued on a regular, periodic basis, which could be hourly, daily, weekly

Answer: AD

QUESTION 4


Which parameter is exchanged during Phase 2 negotiations?

- A. Proxy-id
- B. Certificates
- C. Pre shared key
- D. NAT-Trnsversal Data
- E. Asymmetric Private Keys

Answer: A

QUESTION 5

Exhibit:

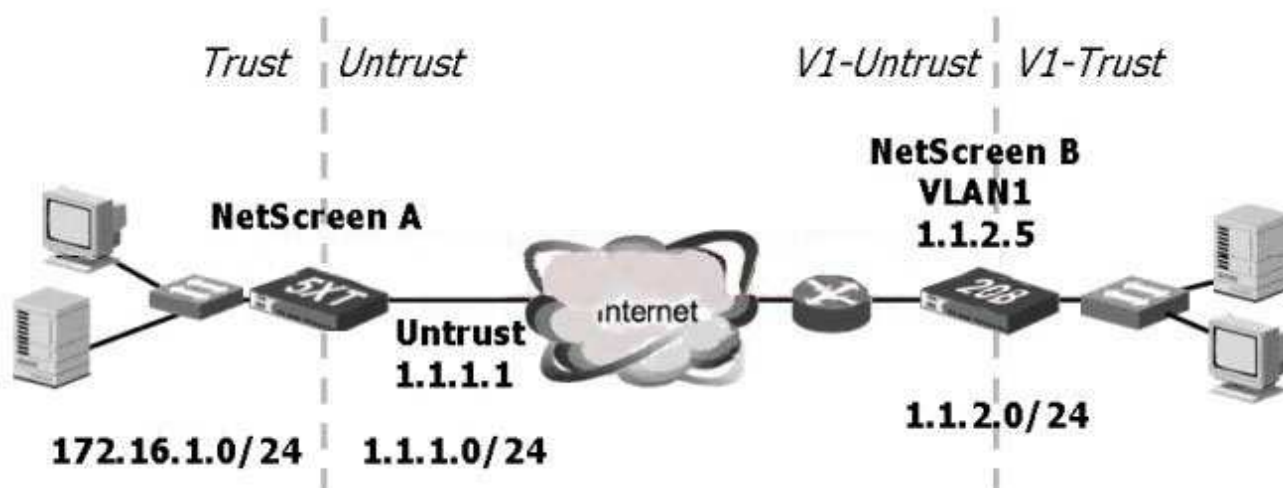

Based on the exhibit, NetScreen A is using a route-based VPN configuration. What two (2) things are "required" on NetScreen A to successfully establish a VPN? (Both device have static IP addresses)

- A. Proxy-ID
- B. Peer address of 1.1.2.5
- C. Local ID of 1.1.1.1
- D. IKE Phase 1 aggressive mode
- E. Tunnel interface with an address in the 1.1.2.0/24 subnet

Answer: AB

QUESTION 6

When using a route-based VPN, what is the default proxy-id for the source address?

- A. 0.0.0.0/0
- B. 0.0.0.0/32
- C. The source address of the first packet through the VPN
- D. The source address of the final Phase 2 packet from the initiator

Answer: A

QUESTION 7

Which is a valid Phase 2 IKE proposal?

- A. pre-g1 -des-md5
- B. rsa-g2 3des-sha
- C. g2-esp-3des-md5
- D. g2-esp-aes120-md5

Answer: C

QUESTION 8

Which two (2) statements are correct regarding NHTB?

- A. The NHTB table can be viewed with the command "get nhtb"
- B. The NHTB table can be viewed with the command "get interface <tunnel interface>"
- C. The NHTB table can be viewed with the command "get interface <physical interface>"
- D. NHTB is enabled automatically when multiple route-based VPNs are bound to a single tunnel interface.
- E. You cannot see the contents of the NHTB table because it is built automatically and is used internally by the system.

Answer: BD

QUESTION 9

Exhibit: