

ISLEVER

# JN0-346

Enterprise Routing and Switching, Specialist  
(JNCIS-ENT)


DEMO

<https://www.islever.com/jn0-346.html>

<https://www.islever.com/juniper.html>

For the most up-to-date exam questions and materials, we recommend visiting our website, where you can access the latest content and resources.

## QUESTION 1

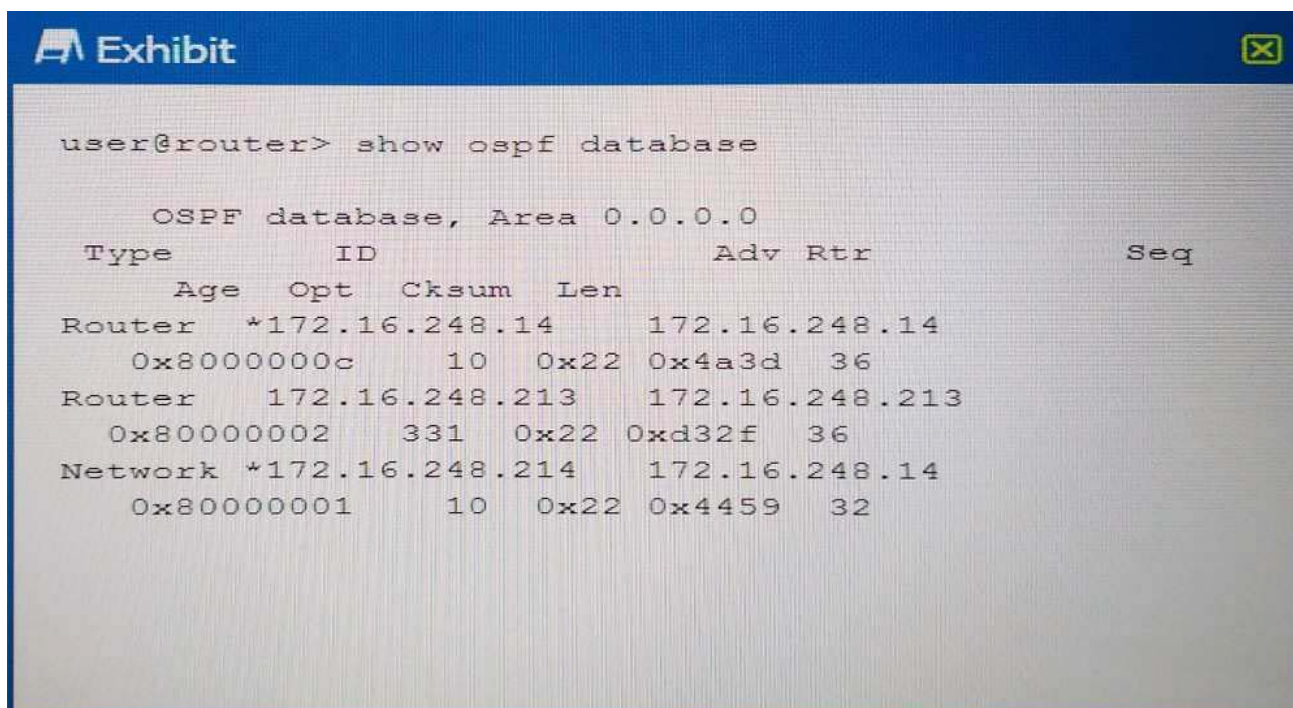

```
user@router> show ospf database

      OSPF database, Area 0.0.0.0
Type      ID              Adv Rtr      Seq
  Age  Opt  Cksum  Len
Router  *172.16.248.14      172.16.248.14
        Ox8000000c      10  Ox22  Ox4a3d  36
Router  172.16.248.213    172.16.248.213
        Ox80000002      331 Ox22  Oxd32f  36
Network *172.16.248.214    172.16.248.14
        Ox80000001      10  Ox22  Ox4459  32
```

Referring to the exhibit, what does the asterisk (\*) indicate?

- A. The router received this entry.
- B. This entry is stale.
- C. This entry is new.
- D. The router originated this entry.

**Answer: C**


## QUESTION 2

What are three RSTP port states? (Choose three.)

- A. learning
- B. forwarding
- C. listening
- D. blocking
- E. discarding

Answer: ABE

### QUESTION 3

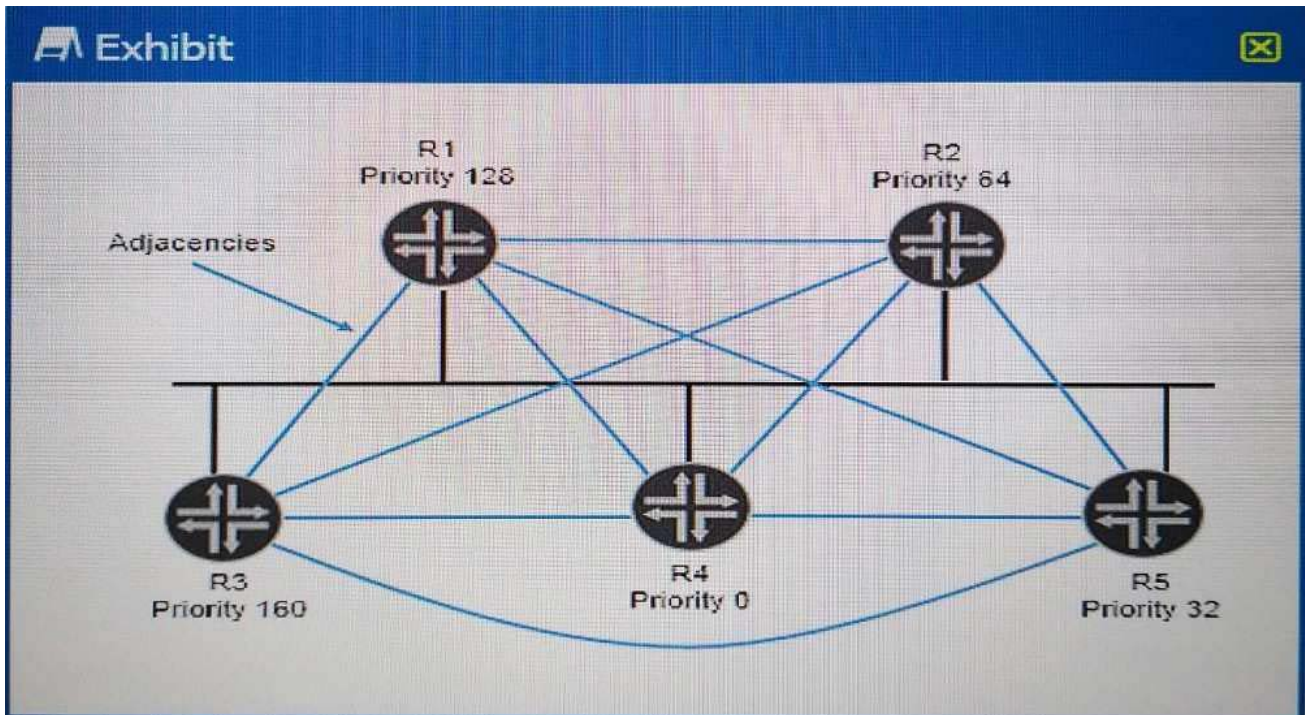

Referring to the exhibit, which router will be selected as the DR?

- A. R1
- B. R5
- C. R4
- D. R3

Answer: D

### QUESTION 4

```
{master:0}
user@switch> show vlans

Routing instance          VLAN name          Tag
      Interfaces
default-switch           default            1

      ge-0/0/0.0*
      ge-0/0/1.0*
      ge-0/0/2.0
      ge-0/0/3.0*
      ge-0/0/4.0
      ge-0/0/5.0*
      ...
```

Referring to the exhibit, what does the asterisk (\*) following the ge-0/0/5.0 interface indicate?

- A. It indicates the interface is a trunk port.
- B. It indicates the interface is not active.
- C. It indicates the interface is an access port.
- D. It indicates the interface is active.

**Answer: D**

## QUESTION 5